



### 3. Router Connection

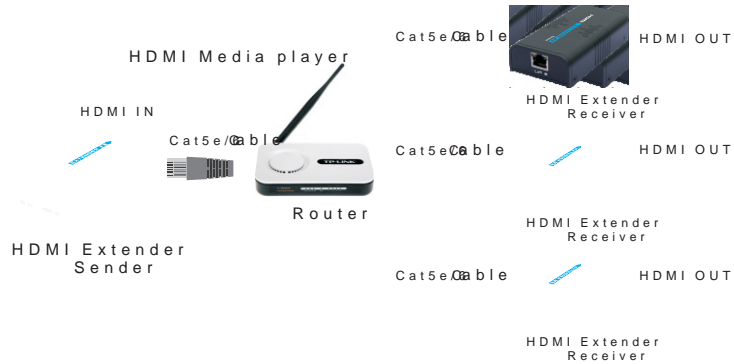

### 4. LAN Connection

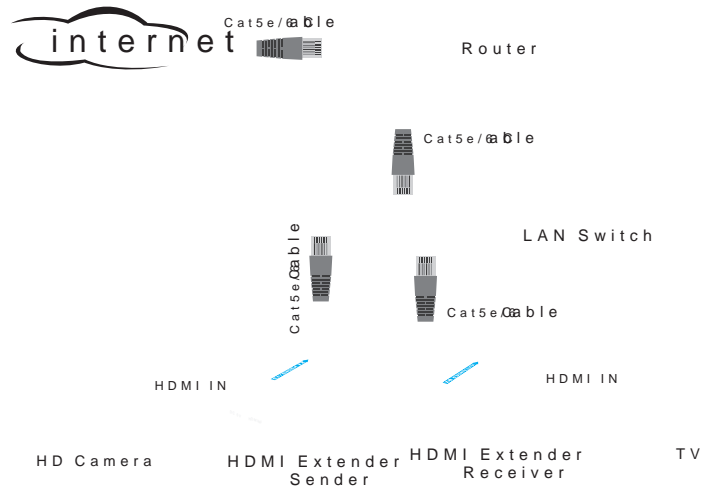

### IV. FAQ

Q: Yellow light of Lan port is flashing but slowly!

A: 1): Check whether HDMI Extender TX and HDMI Extender RX  
2): Check whether HDMI source device output HDMI signal  
3): Change the HDMI cable of TX.

Q: Yellow light of Lan port is flashing quickly but no display?

A: 1): If HDMI source is graphics card, please set the resolution  
by display device.  
2): Check whether HDMI cable of RX is well connected.  
3): Change the HDMI cable of RX.

Q: Yellow Led light of Lan port is not light?

A: 1): Check connection of network cable.  
2): Network cable is too long.

Q: Abnormal color display or flashing after all the devices are

1): Pls press reset button of HDMI extender.  
2): Follow the standard of IEEE-568B.

### V. Technical Specifications

Power Supply	2pc X DC 5V/1A
Supports resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz
Working Temperature	0~60℃
Link Connector (Sender/Receiver)	UTP/STP CAT5e/6
Power Consumption	3W (max) each
Relative Humidity	20%~90%
Dimensions	110 x 58 x 26 mm
Weight	239 g