


## INSTALLATION & SPECIFICATIONS

### OMX-05HMHM0001 4K HDMI to HDMI Audio Extractor

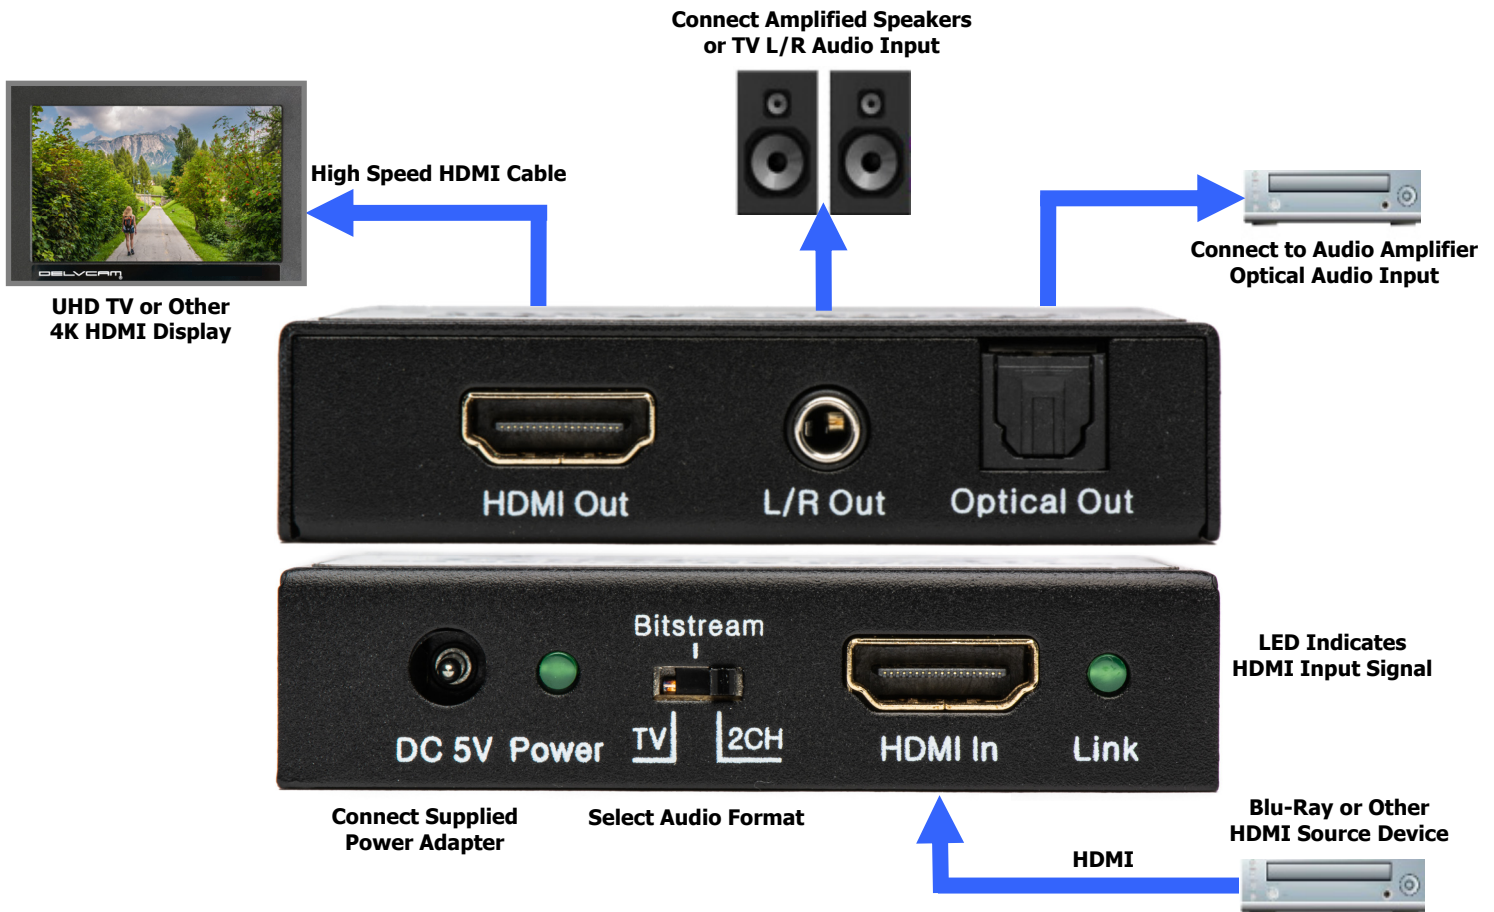

Specifications	
Compliance	HDMI 2.0b HDCP 2.22 HDCP 1.4, DVI
Certification	RoHS
Video Bandwidth	18Gbps
Video Resolutions	4K2K@50/60Hz (YUV):4:4:4 4K2K@30Hz 1080P@120Hz 1080P 3D@60Hz
Color Space	RGB, YCbCr 4:4:4, YCbCr 4:2:2
Color Depth	10-bit, 12-bit
Audio Sampling Rate	Up to 192kHz
Power Consumption	1W

Specifications	
HDMI Audio Passthrough Formats	LPCM 2/5.1/7.1CH Dolby Digital DTS 5.1 Dolby Digital+ Dolby TrueHD DTS-HD Master Audio Dolby Atmos DTS:X
Optical Audio Format	LPCM 2CH LPCM 5.1 Dolby Digital 2/5.1CH DTS 2/5.1CH
Dimensions	2.75 x 2.25 x 0.7 in
Weight	4.59 oz
Includes	1- 5VDC/1A Power Adapter

## Troubleshooting

### No image output

- Ensure power supply is firmly connected. Only use the 5VDC power adapter included with the unit.
- Check that the cables are securely connected.
- Check that the display/TV has been set to the proper channel or input.
- For PC connections via HDMI, set output mode to mirror or extend.

### Display is unstable

- Check all connections.
- Connect the source directly to the display device to ensure there is a signal output. Change the signal source if necessary.
- Use only high-quality HDMI or appropriate cables.



## SAFETY PRECAUTIONS



1. To prevent fire or shock hazard, do not expose this equipment to high humidity and/or dust. Do not use in an unprotected outdoor installation nor any area classified as overly damp or wet.
2. The temperature for installation should be kept between 32°F to 140°F (0°C to 60°C). Avoid direct sunlight exposure or extreme changes of temperature over a short period of time.
3. Do not disassemble the unit or place it on an unstable base.
4. Do not drop the unit and avoid heavy impact.
5. This unit should not be permanently installed unless proper ventilation is provided. Any enclosure openings must not be blocked or covered as they protect the unit from overheating.
6. Before cleaning, turn off the power and unplug the unit from all connections. Use a damp cloth. Do not use liquid cleaners nor aerosol cleaners.
7. Do not overload outlets and extension cords as this may result in a risk of fire or electric shock.
8. Enclosure entry is dangerous. Never push objects of any kind, including liquids, into this unit through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock.
9. Do not attempt to open or service this unit yourself as opening or removing covers may expose you to dangerous voltage and other hazards.
10. There are no user-serviceable parts inside the unit. If the unit requires service contact your authorized dealer, or an authorized repair service company.